φ

GJXH GJXCH 1,2,4,6,8,12 Cores FTTH flat indoor/outdoor fiber optic cable Drop Cable

Basic Information

Certification:

• Place of Origin: Guangdong, China

• Brand Name: DYS

ISO9001-2000, RoHS, ce

Model Number: GJXFH Minimum Order Quantity: 20 kilometers

• Price: \$27.00/kilometers 20-49 kilometers

Packaging Details: 2KM/PLYWOOD DRUM

DRUM SIZE: 40*40*37cm WEIGHT: 21KG/DRUM

• Supply Ability: 100000 Kiloampere/Kiloamperes per Week



Product Specification

• Type: Outdoor Fiber Optic Cable, Cat 1

Number Of Conductors: 1
Fiber Count: 1~12
Cable Weight: 10kg/km
Cable Diameter: 5.0*2.0mm
Fiber Brand: Corning, Of

Fiber Brand: Corning, OFS, YOFCROHS: YES

ROHS: YESCable Color: White, BlackJacket Material: LZSH

Application: FTTH FTTB FTTX NetworkPort: Shen Zhen / Hongkong



More Images



Product Description

Products Description

GJXH GJXCH 1,2,4,6,8,12 Cores FTTH flat indoor/outdoor fiber optic cable Drop Cable



FTTH indoor cable has a much greater bandwidth to carry data and less susceptible to interference thancommon indoor fiber cables and it's ideal for indoor cabling, end users directly cabin, and access network.





Features

Small diameter and light weight, water-resistant, soft and bendable, easy to deploy and maintenance Meet the requirement of thunder-proof, anti-rodent or waterproof Good to use for fiber to the home last mile solution

Application

Outdoor aerial application
Used in the FTTH projects
High speed optical routes in building

Technical parameters

Cable type	OD(mm)	Nominal WeiNom inalWeig ht(kg/km)ght(kg/k m)	tensile strength(N)		Crush Resistance(N/100MM)		Bending Radius(mm)	
			Short- term	Long- term	Short- term	Long- term	Dynami c	Stati c
GJYXFC H-1Xn	(2.0±0.1)*(6.2±0.3)	23.6	600	300	2200	1000	20D	15D
GJYXFC H-2Xn	(2.0±0.1)*(6.2±0.3)	23.6	600	300	2200	1000	20D	15D
GJYXFC H-3Xn	(2.0±0.1)*(6.2±0.3)	23.6	600	300	2200	1000	20D	15D
GJYXFC H-4Xn	(2.0±0.1)*(6.2±0.3)	23.6	600	300	2200	1000	20D	15D
Storage/Working temperature()			-20~+60					



FTTH DROP CABLE

The optical fiber unit is positioned in the centre. Two steel wires or Two parallel Fiber Reinforced Plastics (FRP) are placed at the two sides. Then the cable is completed with a black or color LSZH sheath.

Constructed with 1 or 2 single mode fber (G.657A)

Protected by two parallel strength members (galvanized steel)

New PVC or LSZH outer jacket , designed for indoor / outdoor.






New PVC / LSZH Material, Better Protection.



High quality PVC / LSZH material, low smoke, flame retardant, enhance service life



Normal PVC material, flammable, burning with black smoke. short service life

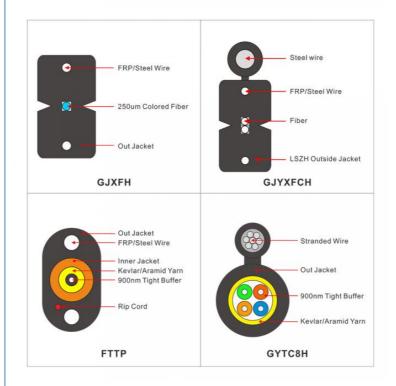





Aerial Application

Light weight, small diameter and eaiser installation, suitable for aerial communication.

2



Duct Application

Excellent rodent bite and crush resistantce performance from the protection of singer armor, suitable for duct application.



Network System

network, metropolitan network, or other access network.



Extreme Environments

Waterproof protection, good moisture-resistance, suitable for extreme conditions, like rainy, foggy, etc.









Our Company



























PACKING & DELIVERY







Sample

Wholesale orders

FAQ

- How many staff's we have?
 Answer: About 250 well-trained staff and engineers

- What certificate we have? nawer. ISO 9001: 2015, RoSH, CE, High and New Tech Enterprise Certificate



Uson Beijing Silk Road Enterprise Management Services Co.,LTD





