₫

horizontal Fiber Optic Access Terminal Closure wall pole mounted joint closure fiber optic splice closure

Basic Information

• Place of Origin: Guangdong, China

• Brand Name: DYS Model Number: FTTH-024 • Minimum Order Quantity: 2 pieces

\$20.00 - \$40.00/pieces

 Packaging Details: 1pcs in one bag or match client requirement

Supply Ability: 20000 Piece/Pieces per Day



Product Specification

Fiber Optic Splice Closure . Type:

• Product Name: Fiber Access Terminal Closure

Dimension(mm): 395*245*130 288

Max. Capacity(Single Fiber):

Application:

FTTH FTTB FTTX Network

Material: ABS OR PC Package: 1 Pcs /box

1 Input Cable Port For Un-cut Cable From Diameter From10~17.5mm Cable Input Port:

6 Output Cable Ports For Cable Diameter Cable Output Port: From 8~17.5mm

-40 ~85 Operating Temperature:

 Splice Tray Quantity: • Port: Shenzhen



More Images









Product Description

Product Description

horizontal Fiber Optic Access Terminal Closure wall pole mounted joint closure fiber optic splice closure

FOSC-024 is designed to seal without screws. The compact size and flip-over cover bring easy operation as well as complete function. The splice trays are jointed with a hinge at one side, which makes the operation in each tray easier. It is designed to prevent from operation damage. APPLICATION

1.lt is belonged to open structure airproof tie-in system of machine pressure. 2.lt is used for the protective connection between two or more optical cables. 3.lt is widely used for communication, network system, CATV, the fiber optic cable by network. 4.lt is uitable for single core fiber optic cable and ribbon fiber optic cable

FEATURES

1.Suitable for ordinary fiber and ribbon fiber. 2.Easy to install and re-entry with a common can wrench. 3.Excellent Mechanical Sealed to protect fiber and splice ensuring durability. 4.Stand up to severe condition of moisture, vibration and extreme temperatures. 5.Fully kitted with all parts for convenient operation. 6.Overlap structure in splicing tray for easy installation. 7.Fiber-bending radium guaranteed more than





395×245×130 Dimension mm

4.5~5 Weight kg

1 input cable port for un-cut cable from diameter from10~17.5mm. 6 output cable ports for cable diameter 4~8mm.

Cable ports

Max. Capacity (Single fiber) 288 fiber Mechanical Sealing type


Single splice tray capacity(Single fiber)

24

Splice tray quantity

1 12



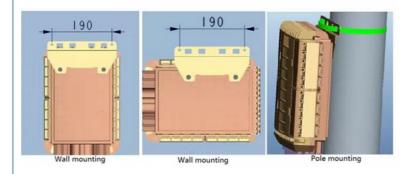





Fiber Optic Closure



Main Products



Our Company

Product inquiry



























PACKING & DELIVERY







Sample

Wholesale orders

FAQ

- How many staff's we have?
 Answer: About 250 well-trained staff and engineers

- What certificate we have? nawer. ISO 9001: 2015, RoSH, CE, High and New Tech Enterprise Certificate



Uson Beijing Silk Road Enterprise Management Services Co.,LTD





