



Factory Price 1 2 core FTTH Fiber Optical Drop Cable 1km Price fthh cable for Indoor/Outdoor use

Our Product Introduction

for more products please visit us on polyknitfabric.com


Basic Information

- Place of Origin: Guangdong, China
- Brand Name: DYS/OEM
- Certification: CE & RoHS, RoHS, ce
- Model Number: GJXFH
- Minimum Order Quantity: 10 kilometers
- Price: \$35.00/kilometers 10-49 kilometers
- Packaging Details: 2KM/PLYWOOD DRUM
DRUM SIZE: 40*40*37cm
WEIGHT: 21KG/DRUM
- Supply Ability: 1000 Kilometer/Kilometers per Quarter



Product Specification

- Type: Outdoor Fiber Optic Cable
- Number Of Conductors: 1
- Product Name: Fthh Indoor Outdoor Fiber Optic Drop Cable
- Application: Outdoor Aerial
- Messenger Wire: Steel Or FRP
- Color: Black, White Or Customized
- Fiber Type: G657A1/G657A2
- Outsheath: PVC,LSZH.
- Fiber Count: 1-2 Cores
- Cable Diameter: 5mm*2mm
- Cable Length: 1km 2km 3km
- Port: Shenzhen

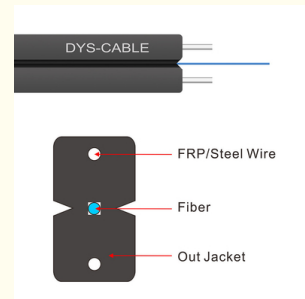

More Images



Product Description

Products Description

Factory Price 1 2 core FTTH Fiber Optical Drop Cable 1km Price fthh cable for Indoor/Outdoor use

1. The optical fiber unit is positioned in the center.
2. Two parallel Fiber Reinforced Plastics (FRP) are placed at the twp sides.
3. Then the cable is completed with a black or white color LSZH sheath.

Applications:

1. Used in indoor cabling, especially used for FTTH
2. Used as access building cable

Features:

1. Special low-bend-sensitivity fiber provides high bandwidth and excellent communication transmission property
2. Two parallel strength members ensure good performance of crush resistance to protect the fiber
3. Simple structure, light weight and high practicability
4. Novel flute design, easily strip and splice, simplify the installation and maintenance
5. Low smoke, zero halogen and flame retardant sheath
6. Simple structure, light weight and high practicability

Outer Jacket:

Flame resistant PVC or LSZH

Our Product Introduction


Cable code	Fiber Count	Cable diameter mm	Cable weight Kg/km	Tensile Strength Long/Short term N	Crush Resistance Long/Short term N	Bending Radius Dynamic/Static mm
GJXFH-1	1	$(2.0 \pm 0.2) \times (3.0 \pm 0.2)$	8	30/60	300/1000	15/30
GJXFH-2	2	$(2.0 \pm 0.2) \times (3.0 \pm 0.2)$	8.5	30/60	300/1000	15/30
GJXFH-4	4	$(2.0 \pm 0.2) \times (3.0 \pm 0.2)$	10	30/60	300/1000	15/30
GJXH-1	1	$(2.0 \pm 0.2) \times (3.0 \pm 0.2)$	9	30/60	300/1000	15/30
GJXH-2	2	$(2.0 \pm 0.2) \times (3.0 \pm 0.2)$	9.5	30/60	300/1000	15/30
GJXH-4	4	$(2.0 \pm 0.2) \times (3.0 \pm 0.2)$	10	30/60	300/1000	15/30



FTTH DROP CABLE

The optical fiber unit is positioned in the centre. Two steel wires or Two parallel Fiber Reinforced Plastics (FRP) are placed at the two sides. Then the cable is completed with a black or color LSZH sheath.

Constructed with 1 or 2 single mode fiber (G.657A)
Protected by two parallel strength members (galvanized steel)
New PVC or LSZH outer jacket, designed for indoor / outdoor.

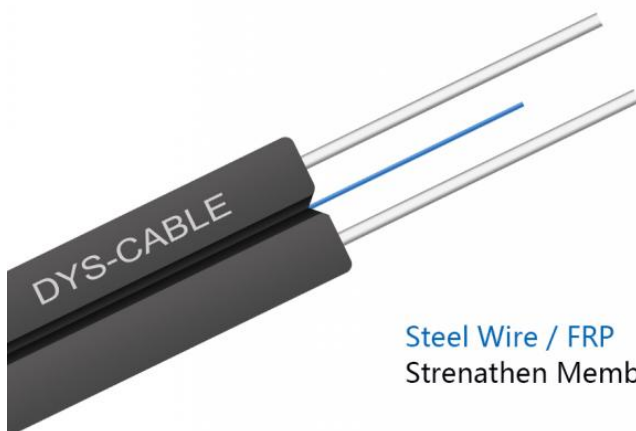


Steel Wire / FRP
Strengthen Member



High quality PVC / LSZH material, low smoke, flame retardant, enhance service life





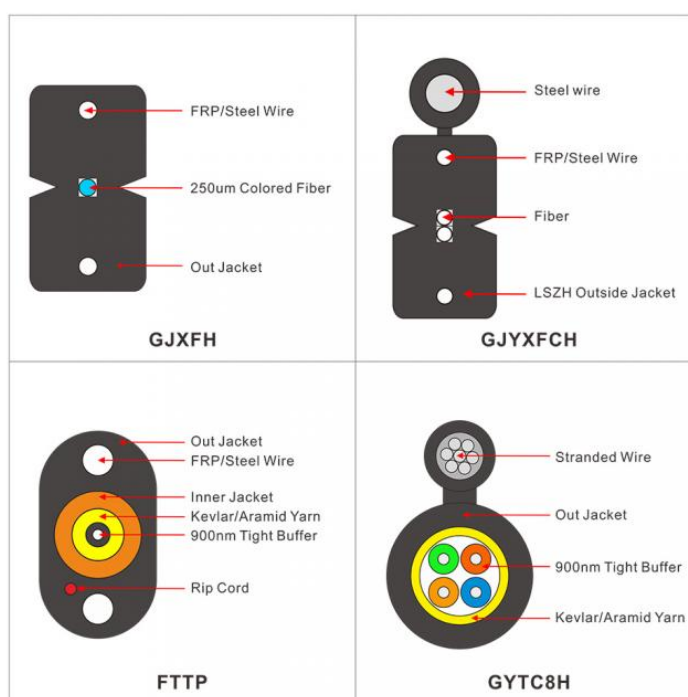





Normal PVC material, flammable, burning with black smoke. short service life



CABLE WORKSHOP



 <p>Aerial Application Light weight, small diameter and easier installation, suitable for aerial communication.</p> 	 <p>Duct Application Excellent rodent bite and crush resistance performance from the protection of singer armor, suitable for duct application.</p> 	 <p>Network System High tensile strength for bureaus network, metropolitan network, or other access network.</p> 	 <p>Extreme Environments Waterproof protection, good moisture-resistance, suitable for extreme conditions, like rainy, foggy, etc.</p> 
---	---	--	--

Our Company

DYS CERTIFICATE

- 1 One-stop Solution Service
- 2 Products made by DYS own factory with competitive price, good quality and fast delivery time

Reliability Testing Laboratory

- Manual Image Measuring Machine
- Automatic Insertion Force Testing Machine
- Tensile Testing Machine
- High/Low Temperature Circulating Machine
- IPX8 Pressure Water Immersion Testing Machine
- Fiber Bending and Torsion Testing Machine
- Salt Spray Testing Machine
- Collision Testing Machine
- Three Directions Vibration Test Machine



COMPANY PROFILE



OUR EXHIBITIONS



PACKING & DELIVERY



Sample
Within 1-2 working days

Wholesale orders
3-7 working days according various quantities

FAQ

1. How many staffs we have?
Answer: About 250 well-trained staff and engineers.
2. When our company be established?
Answer: We started from year 2008.
3. What's our main products?
Answer: DYS dedicates to the developing, production, marketing of the Fiber Optic Cable, Indoor/Outdoor Patch Cord, Splitter, Adapter, Attenuator, and so on.
4. What is the area of the factory?
Over 5000 square meters
More than 30 non dust productions lines in total
5 production lines for Fiber Optic Cable
2 high standard MPO/MTP Jumper assembly lines
15 production lines for standard Jumper
8 PLC Psplitter production lines
5. What certificate we have?
Answer: ISO 9001: 2015, RoSH, CE, High and New Tech Enterprise Certificate.

Product inquiry

Send us inquiry, you will get full catalog.



Beijing Silk Road Enterprise Management Services Co.,LTD



13299345678



13299345678@163.com



polyknitfabric.com

19 Xinjian Gongmen Road, Haidian District, Beijing, China